


Railgates

Tailgates By **THIEMAN**


Raising Performance to New Levels

Model VL


Platform in Loading/Unloading Position

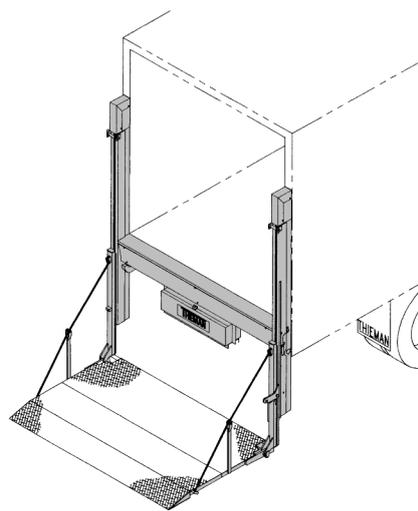

Platform in Docking Position

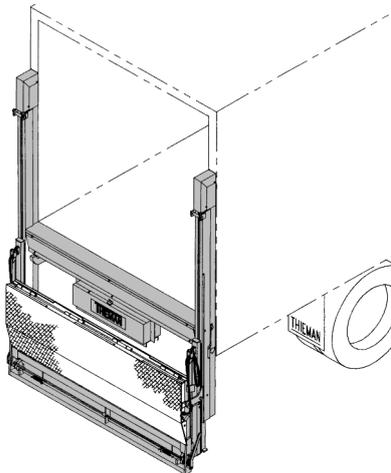

Platform in Travel Position

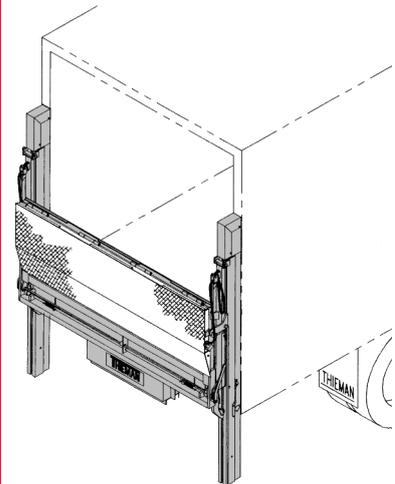

FEATURING:

- Meets TMC Electrical Guidelines
- Pre-Assembled Pump and Cylinder
- Power Unit Enclosure
- 90" x 36" to 90" x 72" Platforms
- 3,000 to 5,000 lb. Capacities
- Direct Docking
- Power Close Platform
- Cable Brake
- Roller Sliders

Designed for handling heavy palletized or bulky loads, the THIEMAN VL series is available with platform sizes up to 90" wide x 72" deep.


The THIEMAN VL platform lowers below bed height for dock loading and easy access to the cargo door.

Designed for strength and durability, the VL is built with the strongest "H" frame in the industry. With the heavy duty frame, high quality roller bearings and a cycle tested, premium lift cable, the THIEMAN VL is the leader of its class.



Features, Benefits and Specifications

Model VLBG

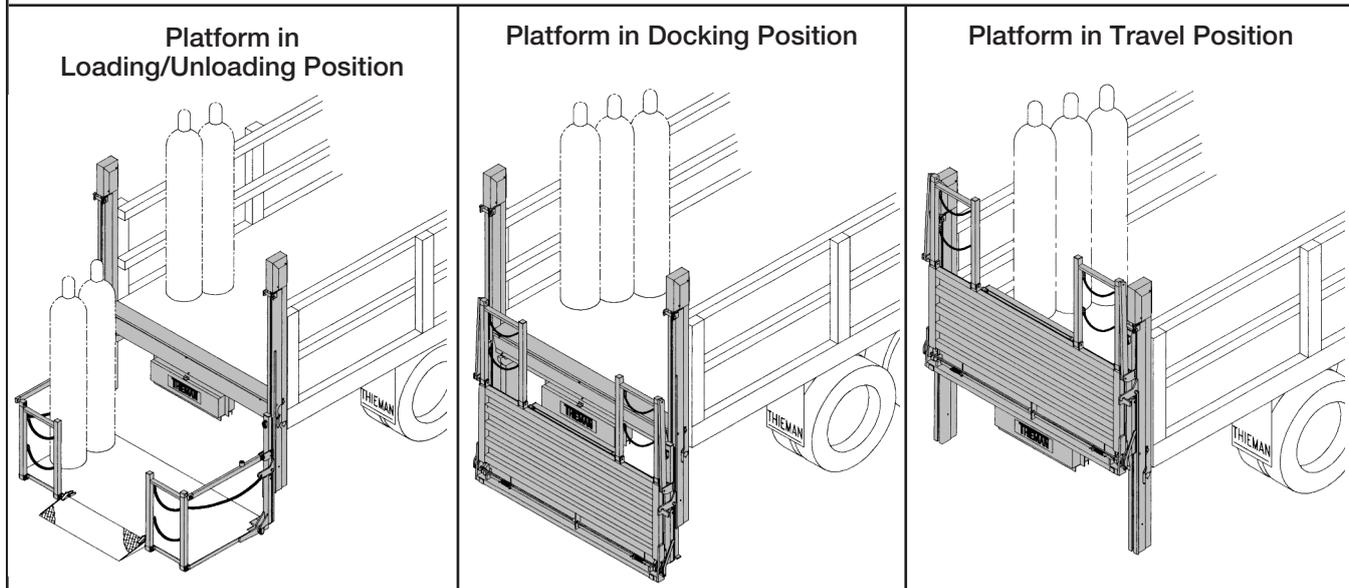

STANDARD FEATURES & BENEFITS:

- Weather Protective Power Unit Enclosure Prolongs Life of Power Unit
- Sealed Toggle Switch Control For Easy Operation and Increased reliability
- Cable Brake for Added Safety
- Unique Heavy Duty Slider Rollers for Smooth, Reliable, Long-Life Operation
- Meets All TMC Electrical Guidelines for Reduced Service Requirements
- Mounts on Truck or Trailer Body for Quick and Easy Installation
- Power Close Platform for Increased Efficiency
- Heavy Duty 3/8" H-Frame for Maximum Rail Strength and Impact Resistance
- Direct Dock Access for Easy Loading of Cargo
- 150 Amp Circuit Breaker for Electrical Protection
- Curb and Street Side Independent Height Adjustment

AVAILABLE OPTIONS FOR VL & VLBG:

- Remote Control w/Plug - Electric Operation Gravity Down (VL or VLBG).
- 16" Aluminum Retention Ramp (VL)
- Cart Stop - 4" Automatic (VL)
- 102" Wide Trailer (VL or VLBG)
- Trailer Kits

Model #	Platform	Load Capacity	Approx. Install Wt.	Bed Height Range
VL 30	90" x 36"+6"	3000 Lbs.	1645	44" to 55"
VL 30	90" x 42"+6"	3000 Lbs.	1676	* 44" to 55"
VL 30	90" x 60"+12"	3000 Lbs.	1745	44" to 55"
VL 30	90" x 72"+12"	3000 Lbs.	1805	44" to 55"
VL 40	90" x 36"+6"	4000 Lbs.	1665	44" to 55"
VL 40	90" x 42"+6"	4000 Lbs.	1696	* 44" to 55"
VL 40	90" x 60"+12"	4000 Lbs.	1765	44" to 55"
VL 40	90" x 72"+12"	4000 Lbs.	1825	44" to 55"
VL 50	90" x 36"+6"	5000 Lbs.	1685	44" to 55"
VL 50	90" x 42"+6"	5000 Lbs.	1716	* 44" to 55"
VL 50	90" x 60"+12"	5000 Lbs.	1785	44" to 55"
VL 50	90" x 72"+12"	5000 Lbs.	1845	44" to 55"
VLBG 30	90" x 36"+16"	3000 Lbs.	1695	44" to 55"
VLBG 30	90" x 42"+16"	3000 Lbs.	1714	* 44" to 55"
VLBG 40	90" x 36"+16"	4000 Lbs.	1710	44" to 55"
VLBG 40	90" x 42"+16"	4000 Lbs.	1734	44" to 55"

NOTE: 90" x 60" and 90" x 72" are Two Piece Platforms.
NOTE: VLBG has Automatic Folding Retention Fence.

NOTE: For bed heights over 55" contact factory.
*NOTE: On 42" Deep One Piece Platforms, the Minimum Bed Height Requirement for Dock Loading is 50"

Distributed By:



600 East Wayne Street
Celina, Ohio 45822
Phone: 419-586-7727 or 800-524-5210
Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com

THIEMAN Reserves the right to Change Products Specifications at any time Without Prior Notice.
Printed in U.S.A. Rev. 5/10 • 2M • MP70078