

ANTHONY
LIFTGATES, INC.®

MRT

Options shown: aluminum platform, stainless steel finish and galvanized slide runners.



MAGNUM RAILTRAC™ SERIES

LIFTING CAPACITIES (LBS): 3500, 4500, 5500, 6500

KEY ADVANTAGES

- 1. Corrosion Resistant Finishes**
Choose from standard Anthony 3-step powder coat, or optional galvanized or stainless steel finishes.
- 2. Low Profile Design**
Dock-friendly, 10.5" deep rails. No bumpers or lights boxes protrude beyond rails.
- 3. Lifetime-Warranty Service Free V-Trac Sliders**
Zero maintenance. No costly moving parts.
- 4. CHS™ - Centralized Hydraulics System**
Sensitive components housed safely inside the stainless steel pump box. Ground-level access to solenoids for safer service.
- 5. Simultaneous Dual Motors**
No downtime from "stuck" backup motors. Load sharing helps reduce pump wear.



QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- **Lifetime-Warranty Service Free Bushings**
Used at all critical pivot points to reduce wear without the need for routine lubrication.
- **Retracted Cylinders**
Hydraulic pistons are retracted when gate is stowed to protect from pitting that causes leaks.
- **Hassle Free Retention Ramp**
Patent-pending retention ramp design has no moving parts, springs, or chains.
- **Industry-Leading Warranty**
3 years mechanical + 3 years electrical & hydraulic, parts and labor. 10 Year structural corrosion warranty on galvanized & stainless components.
- **Pressure Compensated Flow Valve**
Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.
- **Marine Duty Potted Toggle Switches**
Heavy duty toggles, potted to permanently separate and seal electrical connections from corrosion.
- **Twin Cylinder Direct Drive with Level Guard**
Swivel cylinder ends guard against piston scoring on unlevel ground.
- **Travel Switch**
Curbside inner rail up/down switch with EZ service access panel.
- **Stainless Steel Pump & Battery Boxes**
Impact and corrosion resistant enclosures to protect sensitive components.
- **Self-Venting Cylinders**
Allows air to be easily purged from the hydraulic system for smooth, level operation.

QUALITY COMES STANDARD

AVAILABLE MODELS, PLATFORMS AND CAPACITIES


Model	Capacity (lbs)	Bed Height Range
MRT-3500	3500	38" - 58"
MRT-4500	4500	38" - 58"
MRT-5500	5500	38" - 58"
MRT-6500	6500	38" - 58"
Vehicle Body Width		Platform Width
96" Wide Model		80"
102" Wide Model		86"
Available Platforms (Load Depth + Ramp)		
Two Piece Steel with Integrated Cart Stop Ramp 60" or 72" + 12"		
Two Piece Steel with Aluminum Retention Ramp 72" or 84" + 16"		
Two Piece Aluminum with Aluminum Retention Ramp 72" or 84" + 16"		

Platform width is 80" for 96" model and 86" for 102" wide model.
Also available in bed-height-stowed versions.

OPTIONS

- Many Steel and Aluminum Platform Options
- Dock Header Kit with Available LED Dome Light
- TrailChargers
- eNow Solar Charge Systems
- Power down (on demand)
- Trailer Power Kits
- Anti-Slip Platform Coating
- Shock Resistant AGM Batteries
- Wireless and Corded Remote Controls

TRUCK MOUNTING REQUIREMENTS

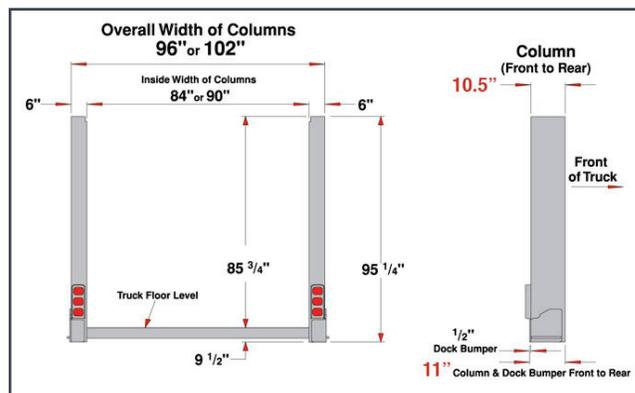

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383

Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com