

ANTHONY
LIFTGATES, INC.®

ETU




TUCKUNDER™ SERIES

LIFTING CAPACITIES (LBS):
2000, 2500

KEY ADVANTAGES

- 1. Grease Free Operation**
Advanced long-life bushings eliminate the need for routine lubrication.
- 2. Large Platform Load Area**
Best-in-class platform size provides plenty of cargo space.
- 3. Dual Spring Assist**
Platform main and flip are spring assisted for easy operation.
- 4. CHS - Centralized Hydraulic System**
Sensitive hydraulic and electrical components housed safely within the galvanized steel pump box.
- 5. EZ Mount Installation**
Shipped assembled for easy installation.

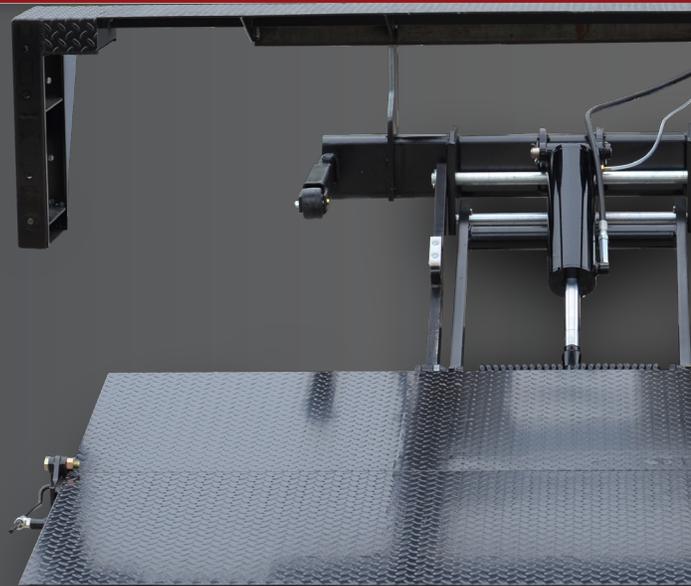

QUALITY, RELIABILITY, CUSTOMER SERVICE

MADE IN THE USA 

STANDARD FEATURES

- **Pressure Compensated Flow Valve**
Constant, controlled speeds at all times. Prevents "free-fall" under certain hydraulic failures.
- **Anthony Premium Polymer Finish**
Steel components are washed, shot blast prepped, and coated with premium finish.
- **Factory Filled Power Pack**
Factory tested and filled with low pour hydraulic fluid.
- **Circuit Protection**
Inline fuse protects power supply from a "dead short".
- **Weatherproof Potted Control**
Heavy duty toggle, potted to permanently separate and seal electrical connections from corrosion.
- **Dock Bumpers Steps**
Assist installers in meeting ingress- egress requirements.

QUALITY COMES STANDARD

AVAILABLE MODELS, PLATFORMS AND CAPACITIES

| Model | ETU-20-44 | ETU-25-50 |
|----------------|----------------|-----------------|
| Capacity (lbs) | 2000 | 2500 |
| Bed Height | 36" - 44" | 38" - 56" |
| Platform | 80" x 44 Wedge | 80" x 50" Wedge |

- Bed height is min. laden, max. unladen

OPTIONS

- 96" or 102" wide floor extension
- Dock bumper pad kit
- Secondary control options
- Cab or ignition cutoff switch
- ICC Bumper Kit

TRUCK MOUNTING REQUIREMENTS

| A | B | C | |
|------------|-----------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bed Height | Bed to Top of Tube Assembly | Mounting Plate | |
| 36" - 41" | 15 3/4" | 29" | <p>Bed Extension 12" (Reference)</p> <p>Body Crossmembers</p> <p>Body Long Sills</p> <p>Wood Filler</p> <p>Chassis Frame</p> <p>Liftgate Mounting Plate</p> <p>Pump box extends 7" forward of adapter frame tube</p> |
| 42" - 49" | 19" | 24 1/4" | |
| 50" - 51" | 20" | 23 3/4" | |
| 52" - 53" | 21" | 23 1/4" | |
| 54" - 55" | 22" | 22 5/8" | |
| 56" - 57" | 23" | 22 1/2" | |

Anthony Liftgates, Inc.

1037 W. Howard Street
P.O. Box 615
Pontiac, IL 61764-0615

Phone: 815.842.3383

Fax: 815.844.3612

Toll Free: 800.482.0003

www.anthonyliftgates.com