

TUK-A-WAY® SERIES

The TE-33 Series


MAXON®



TE-33 SPECIFICATIONS

MAXON's TE-33 liftgate model has taken "standard" to a whole new level. The 3,300 lb, medium-duty, Tuk-A-Way® delivers premium features in a standard tuk.

- Steel or Aluminum platforms
- SmartSpace™ - gap between extension plate and platform that mitigates a potential pinch point
- Bolted-on extension plate and steps
- Hydraulic locking
- Grease fittings at all critical rotation points
- Low bed height as well as walk ramp ready models available

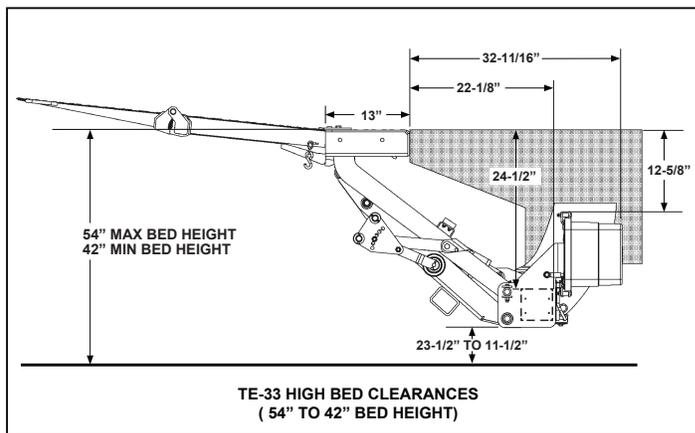

Lift Dimensions and Mounting Requirements
Refer to install manual for TE-33 L

MODEL	CAPACITY	PLATFORM SIZE	TOTAL WEIGHT	BED HEIGHT
TE-33	3,300 Lbs.	48" x 84" ST, AL/AL	990 Lbs - ST 900 AL/AL	42" Min. Laden
		52" x 84" ST, AL/AL	1,020 Lbs - ST 930 AL/AL	54" Max. Unladen
TE-33 L	3,300 Lbs.	48" x 84" ST, AL/AL	990 Lbs - ST 900 AL/AL	38" Min. Laden 44" Max. Unladen
		52" x 84" ST, AL/AL	1,020 Lbs - ST 930 AL/AL	40" Min. Laden 44" Max. Unladen
TE-33 WR	3,300 Lbs.	48" x 84" ST, AL/AL	990 Lbs - ST 900 AL/AL	44" Min. Laden 54" Max. Unladen
		52" x 84" ST, AL/AL	1,020 Lbs - ST 930 AL/AL	46" Min. Laden 54" Max. Unladen

"L" - Low bed height models
 "WR" - Walk ramp models
 "ST" - Steel
 "AL" - Aluminum

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
 800.227.4116 Fax 888.771.7713, www.maxonlift.com

TUK-A-WAY® SERIES



The TE-33 Series

MAXON®

Optional Features

- Hand held control
- MAX ECU® (Electrical Control Unit)
- Cab Cut-off
- Power down
- Dual Cart stops
- Galvanized finish

Loadable Platform Space with Cart Stops Deployed

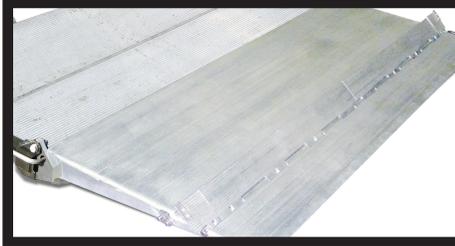

Large Wedge-Type Platform Design

The TE-33 features large 48" x 84" and 52" x 84" wedge-type steel or aluminum/aluminum platforms. The AL/AL platforms come optional with dual cart stops. The wedge design allows smooth transition of load on and off the platform.



Twin Cylinder Design

The TE-33 features a twin cylinder, mid-arm design resulting in great performance and stability.



Hydraulic Locking

The TE-33 features a hydraulic lock valve that takes operator involvement out of the equation. As soon as the control button is released the gate is always securely locked.



Bolt-On Steps & Extension Plate

The steps and extension plates were strategically designed to bolt-on in order to avoid welding on the gate that would affect the factory paint. The steps were also designed as an integral part of the gate that would easily allow for them to be exchanged in case of dock damage.



Aluminum Platform MAXGRIP® STANDARD

Lightweight aluminum platform design with recessed hinges provides a flat loading surface over entire width of platform. The platform features MAXGRIP® (knurled platform surface) and dual assist torsion springs that minimize the opening and closing force.

Distributed by:



MAXPRO® Paint or GALVANIZED Finish

This patented, Maxon exclusive paint process has a tough polyurea top coat and an AL rich primer that combat corrosion and keep the liftgate looking like new. For even more corrosion protection, the TE-33 is also available in a galvanized finish.

M-194-0523



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com